

M100 Filters

The most efficient hydraulic filters that require no external power source



flowrates

**up to 400 m³/h
(1760 US gpm)**

filtration degrees

500-80 micron

water for cleaning

**less than 1%
of the total flow**

minimum operating
pressure

2 bar (30 psi)

features:

- Large filtration area, reliable operating mechanism and simple construction make the M100 filters the ideal solution for agricultural and municipal filtration systems where no power is available
- Automatic flushing according to pressure differential
- No interruption of downstream flow during flushing
- Minimal volume of reject water

How the FILTOMAT M100 Filters Work

General

The Amiad FILTOMAT M100 Series are mid-range automatic filters, ideal for remote installation sites, with a water-driven self-cleaning mechanism that doesn't require external power source to operate. With their various screen areas the M100 models support flow-rates of up to 400 m³/h (1760 US gpm), with filtration degrees of 500 down to 80 micron and inlet/outlet diameters from 2"-10".

The Filtering Process

The filtration process begins when raw water flows through the filter inlet (1) into the coarse screen (2). Here, the water is pre-filtered in order to protect the cleaning mechanism from large debris. The water then passes through the inner surface of the fine screen; dirt particles are trapped and accumulate inside the filter while clean water flows through the filter outlet. The gradual dirt buildup on the inner screen surface causes a filter cake to develop, with a corresponding increase in the pressure differential across the screen.

The Self-Cleaning Process

When the pressure differential across the screen reaches a pre-set level of 0.5 bar (7 psi), the M100 filter's rinse controller (3) starts the cleaning process by opening the internal flush valve (4). This results in the release of a back-flush stream flowing through the nozzles (5) out of the hollow Suction Scanner Shaft (6) and the Turbine (7) to the Drainage pipe (8).

M100 Models


Amiad's "FILTOMAT M100 SERIES" consists of the following models:

M100-750 for up to 40 m³/h (176 US gpm)

M100-1500 for up to 80 m³/h (352 US gpm)

M100-4500 for up to 180 m³/h (793 US gpm)

M100-6800 for up to 400 m³/h (1760 US gpm)

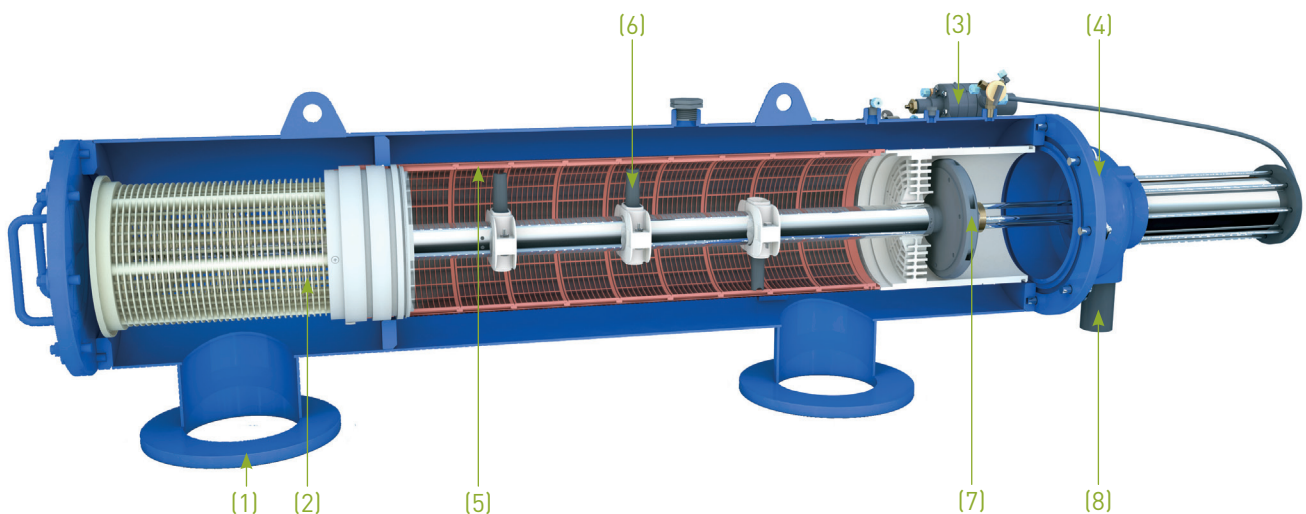

M100 750



M100 1500




M100 4500










M100 6800



Typical Installation Drawing

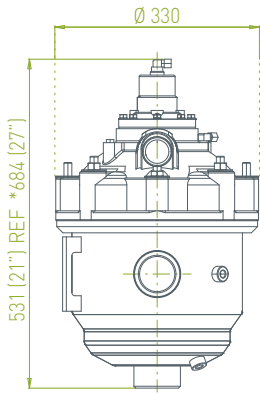

Head Loss Graphs in clean water

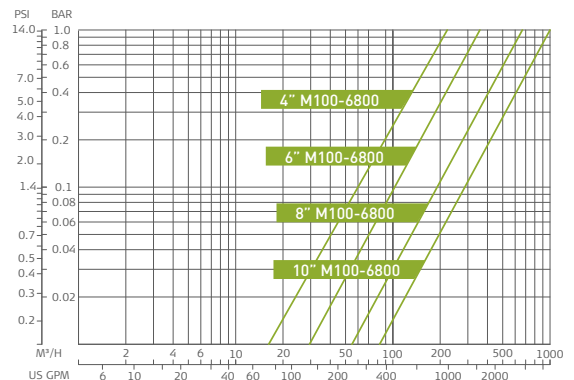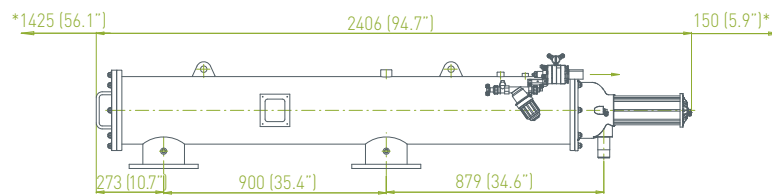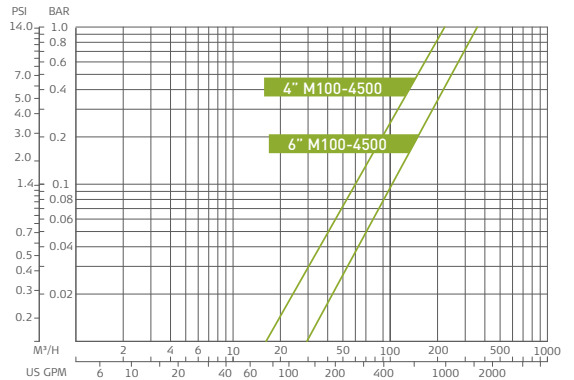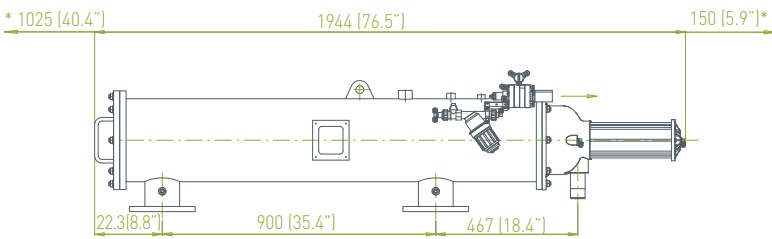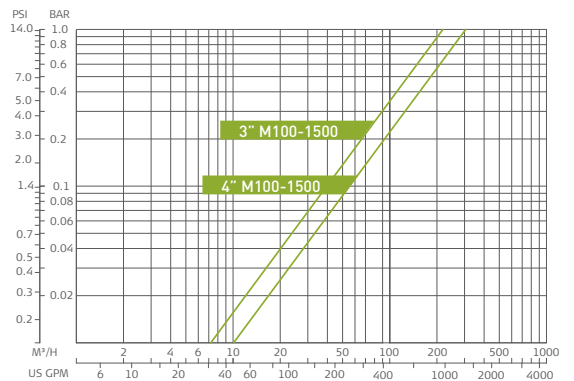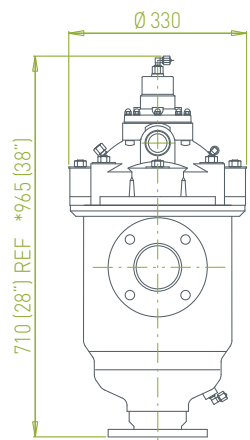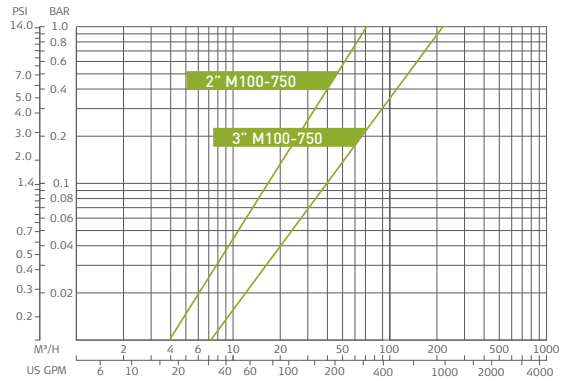

Dim: mm (inch)

*Approx. length required for maintenance

Technical Specifications

Filter Type	M100 750	M100 1500	M100 4500	M100 6800
-------------	----------	-----------	-----------	-----------

General Data				
Maximum flowrate*	40 m ³ /h (175 US gpm)	80 m ³ /h (350 US gpm)	180 m ³ /h (793 US gpm)	400 m ³ /h (1760 US gpm)
Inlet/Outlet diameter	2" 50mm 3" 80mm	3" 80mm 4" 100 mm	4" 100 mm 6" 150 mm	4" 100mm 6" 150mm 8" 200mm 10" 250mm
Standard filtration degrees	500, 300, 200, 130, 100, 80 micron			
Min. working pressure	2.5 bar (36 psi) For lower pressure please consult Amiad			
Max. working pressure	8 bar (116 psi)		10 bar (150 psi)	
Max. working temperature	55°C (131°F)			
Weight [empty]	2" 22 kg (48.5 lb) 3" 25 kg (55 lb)	3" 30 kg (66 lb) 4" 35 kg (77 lb)	4" 90 kg (198 lb) 6" 115 kg (253.5 lb)	4" 110 kg (242.5 lb) 6" 120 kg (264.5 lb) 8" 140 kg (308.6 lb) 10" 158 kg (348 lb)

* Consult Amiad for optimum flow depending on filtration degree & water quality.

Flushing Data				
Minimum flow for flushing (at 2 bar - 30 psi)	15 m ³ /h (66 US gpm)	20 m ³ /h (88 US gpm)	26 m ³ /h (114 US gpm)	30 m ³ /h (132 US gpm)
Reject water volume per flush cycle (at 2 bar - 39 psi)	15 liter (4 US gallon)	20 liter (5.2 US gallon)	125 liter (33 US gallon)	150 liter (40 US gallon)
Flushing cycle time	10 seconds	10 seconds	15 seconds	15 seconds
Exhaust valve	1.5" 40 mm	1.5" 40 mm	1.5" 40 mm	1.5" 40 mm
Flushing criteria	Differential pressure of 0.5 bar (7 psi), time intervals and manual operation			

Screen Data				
Filter area	750 cm ² (161 in ²)	1500 cm ² (232 in ²)	4500 cm ² (698 in ²)	6800 cm ² (1054 in ²)
Screen types	Molded Weave Wire stainless steel 316L			

Construction Materials*	
Filter housing	Epoxy-coated carbon steel 37-2. (Stainless Steel 316 on request)
Filter lid	Epoxy-coated carbon steel 37-2. (Stainless Steel 316 on request) High density Polypropylene
Cleaning mechanism	PVC and Stainless Steel 316L
Exhaust valve	Brass, Stainless steel 316, BUNA-N
Seals	BUNA-N
Control	Aluminum, Brass, Stainless steel 316, PVC, Acetal

* Amiad offers a variety of construction materials. Consult us for specifications.

Headquarters

Amiad Water Systems Ltd. D.N. Gatil Elyon 1, 1233500, Israel,
Tel: 972 4 690 9500, Fax: 972 4 814 1159,
E-mail: info@amiad.com

America



Amiad USA Inc. Main Office and Manufacturing: 120-J Talbert Road, Mooresville, NC 28117,
Tel: 1 704 662 3133, Fax: 1 704 662 3155, Toll Free: 1 800 24 FILTER,
E-mail: info@amiadusa.com www.amiadusa.com

West Coast Sales Office and Warehouse:
2220 Celsius Avenue, Oxnard, California 93030
Tel: 805 988 3323, Fax: 805 988 3313, Toll Free: 1 800 969 4055

Chile

Amiad Andina, Carretera General San Martín 16.500 No 30,
Loteo Industrial Los Libertadores, Colina, Santiago de Chile,
Tel: 56 2 24895100, Fax: 56 2 24895101, E-mail: amiadandina@amiad.com

Brazil

Amiad Sistemas de Água Ltda., Av. Funchal, 411, Conj. 42, Vila Olimpia, São Paulo, CEP 04551-060
Tel: +55 11 31923824, E-mail: infobrasil@amiad.com

Amiad Oil & Gas, E-mail: amisur@adinet.com.uy

Mexico

Amiad Mexico SA DE CV,
Priv. Retorno 8, Lote 3, Mza. 1, Interlomas Estado de Mexico
Tel/Fax: +52 55 636 28122, E-mail: info@amiadmexico.com

Asia



India

Amiad Filtration India Pvt Limited, 305 Sai Commercial Building,
Govandi St Rd, Govandi Mumbai 400 088,
Tel: 91 22-67997813/14, Fax: 91 22-67997814, Email: info@amiadindia.com

China

Amiad China (Yixing Taixing Environtec Co., Ltd.) 70 Baihe Chang, Xingjie Yixing Jiangsu, 214204,
Tel: 86 510 87134000, Fax: 86 510 87134999, E-mail: marketing@taixing.cc

South-East Asia

Filtration & Control Systems Pte. Ltd., 19B Teo Hong Road, 088330 Singapore,
Tel: 65 6 337 6698, Fax: 65 6 337 8180, E-mail: amiad@amiad.com.sg

Australia



Amiad Australia Pty Ltd. 138 Northcorp Boulevard, Broadmeadows, Victoria 3047,
Tel: 61 3 93585800, Fax: 61 3 93585888, E-mail: sales@amiad.com.au

Europe



Amiad Water Systems Europe SAS, Ilot No4 ZI La Boitardière, 37530 Chargé, France,
Tel: 33 (0) 2 47 23 01 10, Fax: 33 (0) 2 47 23 80 67, E-mail: info@amiad-europe.com

Germany

Amiad Water Systems SAS Europe (German branch office)
Zweigniederlassung Deutschland Prinz-Regent-Str. 68 a 44795 Bochum,
Tel: 49 (0) 234 588082-0, Fax: 49 (0) 234 588082-10, E-mail: info@amiad.de

Turkey

FTS – Filtration & Treatment Systems, Istanbul yolu 26 Km, Yurt Orta Sanayii, Saray, Ankara,
Tel: 90 312 8155266/7, Fax: 90 312 8155248, E-mail: info@fts-filtration.com